



UNI-ROCK

Unitex®



YOUR WALLS
OUR PRIDE

UNI-ROCK 'Glassface'

Unitex® Uni-Rock is designed to produce stunning deep concrete effects with a polished smooth appearance.

Designed specifically for skim coating of prepared masonry surfaces to yield a polished smooth and decorative internal or external feature wall, it is a perfect match for Unitex DrySeal hydrophobic sealer. Uni-Rock can also be beeswax coated for internal feature walls staining and gloss level effects.

Available in four colours:

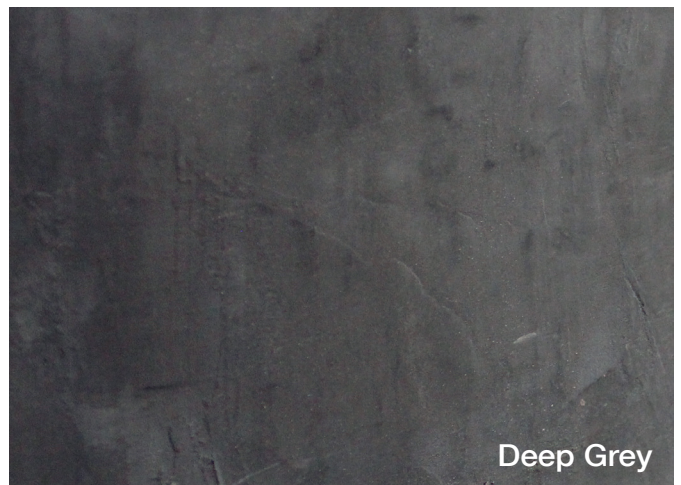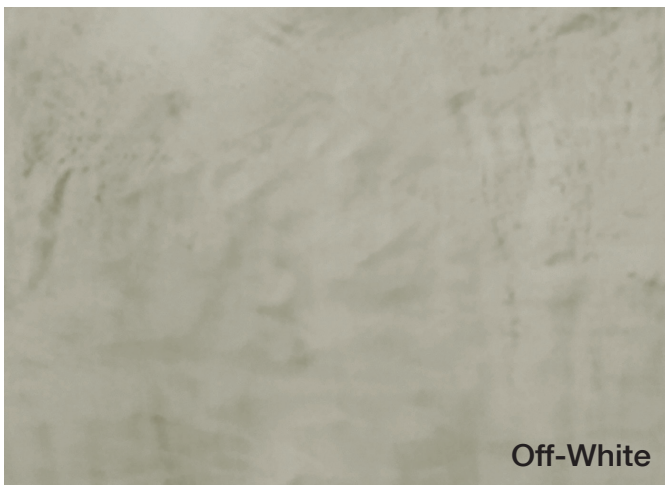

- Product size: 15L pail (15kg powder form)
Coverage: 15-18m² (at 1mm thickness)
Substrate suitability: Rendered masonry surfaces and Precast Panel. Not suitable for use over Base Board or Blue-Board
Application tools: Trowel
Dry time: Minimum 72 hours at standard conditions (25 degrees celcius and 50% humidty), after application



Unitex
22 Park Drive
Dandenong VIC 3175

Phone: (03) 9768 4900
Fax (03) 9768 4999
www.unitex.com.au

Unitex (NSW)
14 Artisan Road
Seven Hills NSW 2147

Phone: (02) 9838 0911
Fax (02) 9838 9555
www.unitex.com.au

URW (Oakleigh)
1346 North Road
Oakleigh VIC 3167

Phone: 1800 RENDER
Fax (03) 9544 3620
www.render.com.au

URW (SA)
2/54-56 Cavan Road
Dry Creek SA 5094

Phone: 1800 RENDER
Fax (08) 8262 7922
www.render.com.au